


Let's get started



AT&T Wireless Internet

BC

Your New Device

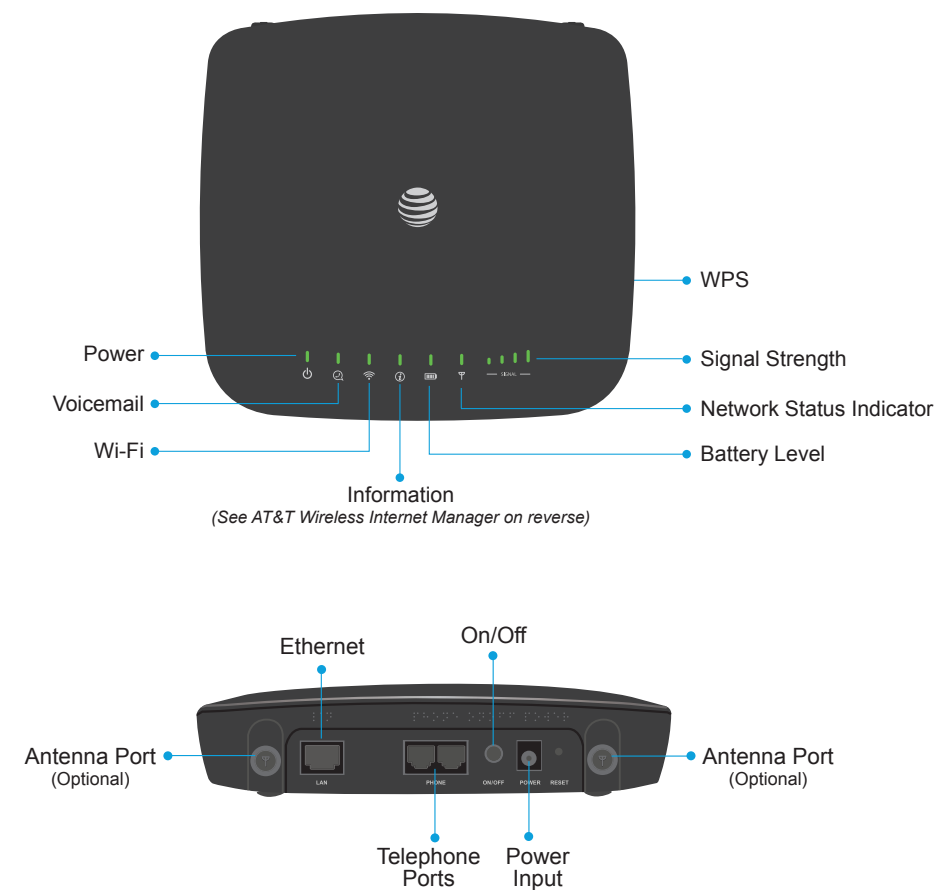


For more information, refer to your User Guide, visit att.com/devicehowto, or call AT&T Support at 1-800-331-0500.

Before You Begin

The AT&T Wireless Internet device uses the AT&T cellular network and DOES NOT use your home phone wall jacks.

Your device should be located:


- Where you have a strong signal from a cell tower, typically near a window or outer wall. Signal strength may vary in different parts of your home.
- Near an electrical wall outlet.
- In the general area where you'll be using your home phone, computer, or Wi-Fi enabled devices.

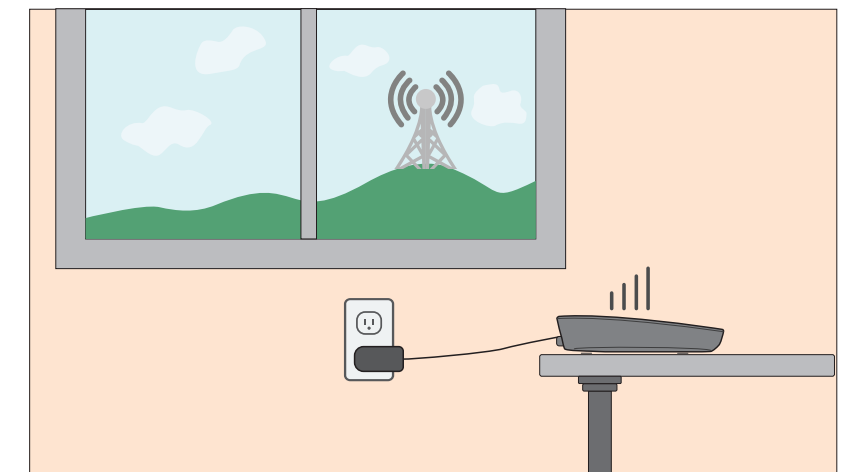


STEP 1: Set Up Your Device

A Install the Backup Battery

1. Open the battery compartment by pushing the tab in and lifting up the cover.

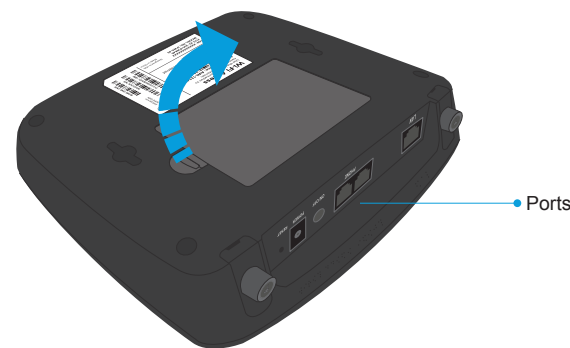


2. Insert the backup battery.

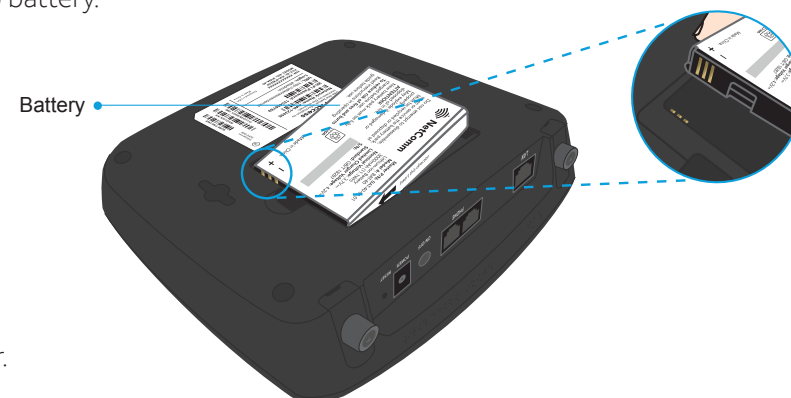

3. Replace the cover.

B Turn On Your Device


1. Plug the power cord into an electrical wall outlet.
2. Connect the other end of the power cord to the Power Input port on the back of your AT&T Wireless Internet device.
3. Press the On/Off button. The Power light turns solid green.

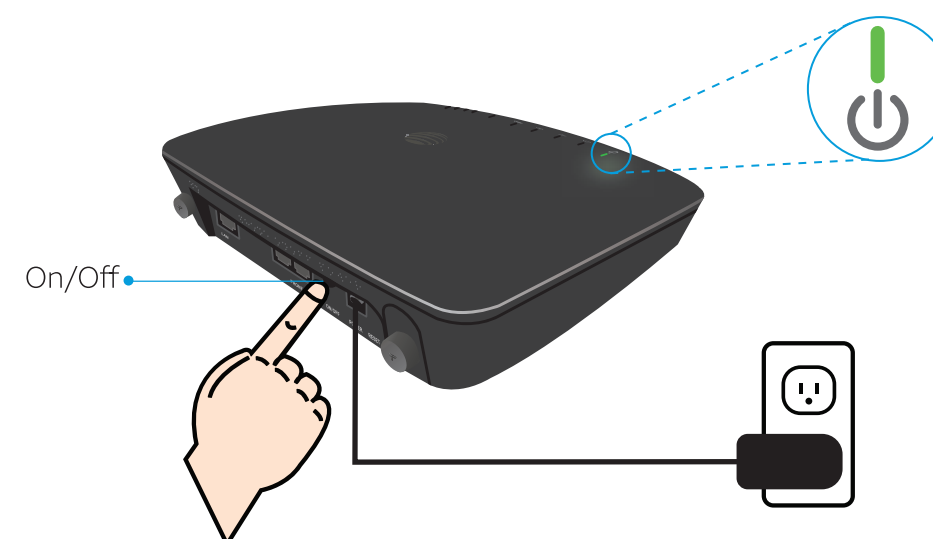

C Check the Wireless Signal

Wait a few seconds for the signal strength light to turn on, while your device connects to the cellular network.


Confirm signal strength light has four (4) lit bars for optimal performance. Fewer bars indicate a moderate signal, which may be sufficient.

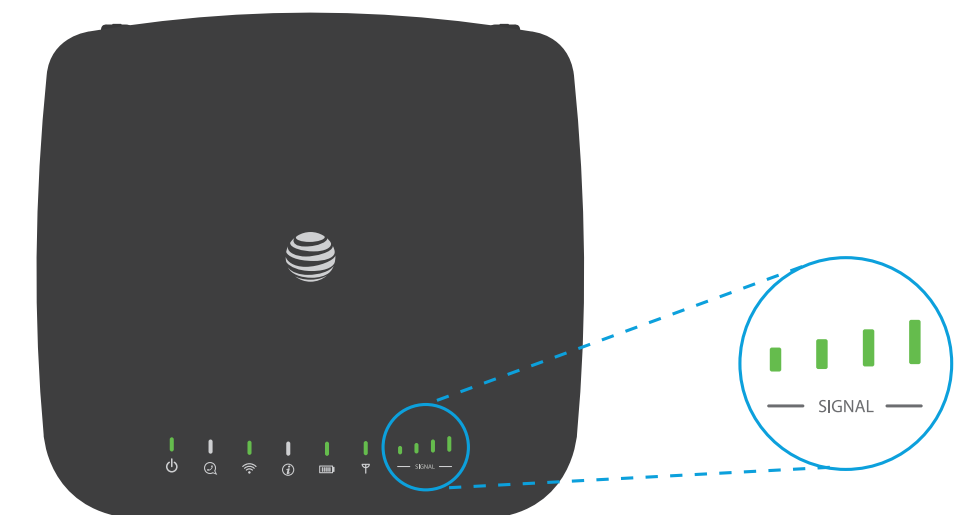

STEP 2: Connect Your Phone


A) Unplug Your Phone From the Wall Jack

The AT&T Wireless Internet device is not used with your home phone wall jack.
NOTE: If you have a cordless phone, keep it plugged into a power outlet.

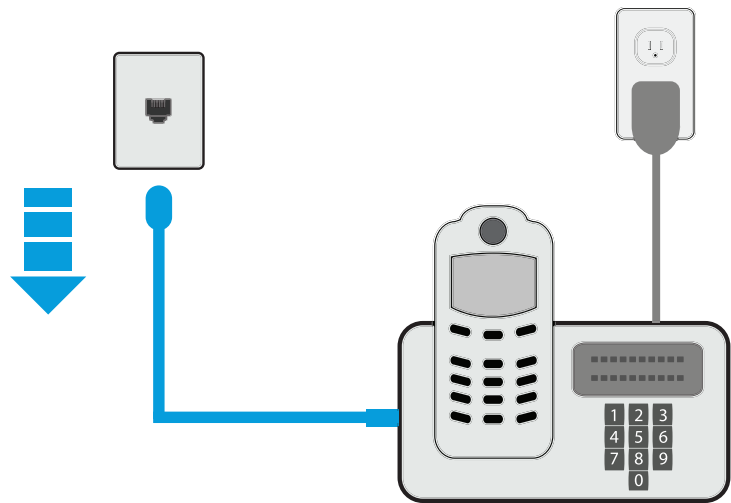

B) Connect Your Phone to the Device

Plug your phone into the “Phone” port on the AT&T Wireless Internet device using your existing phone cable or the included phone cable.
NOTE: Do not plug the device or your home phone into your wall jack.

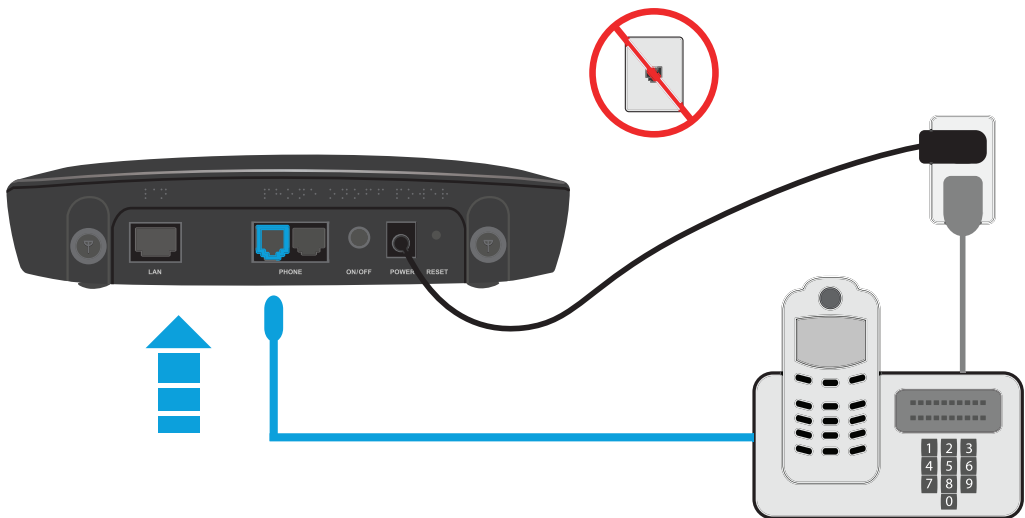

C) Place a Test Call


Place a test call from your connected home phone. Make sure to dial the 10-digit phone number, including area code.
For best results, place the cordless phone base at least twelve (12) inches from the AT&T Wireless Internet device.

Transferring a Phone Number From Your Previous Provider

Transferring a phone number can take about 4 days, so you should keep a phone plugged into your wall jack to receive calls (including 911) on your old service until your transfer completes. However, you can make calls immediately on your AT&T Wireless Internet device. Check transfer status at att.com/port.

Important Phone Tips

- Voicemail is included with your service. Dial “1” to set up and access your voicemail. If you choose to use an answering machine instead, set it to fewer than 4 rings.
- To place phones throughout your home, use a cordless phone system with multiple handsets. Wall jacks are not used with the AT&T Wireless Internet device.

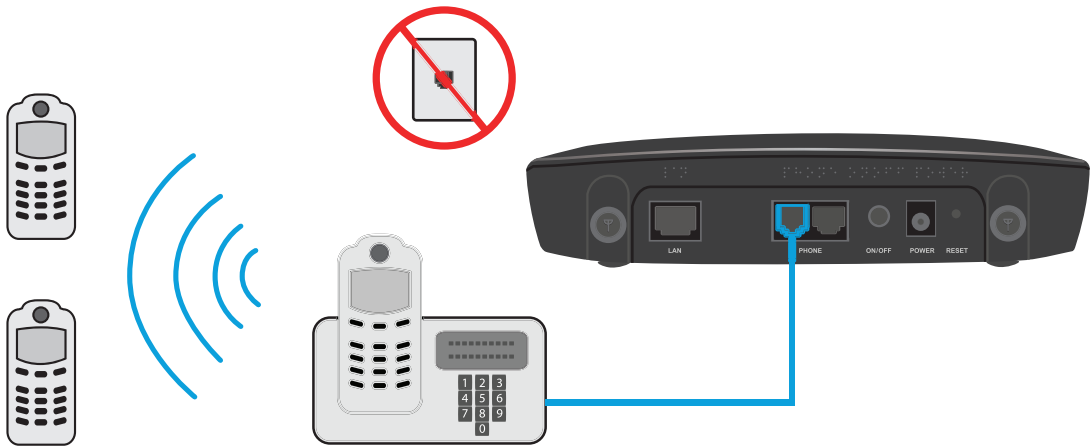


STEP 3: Connect to the Internet

(Requires purchase of a Wireless Internet Data plan)

A) Select Your Internet Connection

To Connect via Wi-Fi:

1. Open the Wi-Fi network manager on your computer or Wi-Fi enabled device.
2. Find and select the AT&T Wireless Internet Wi-Fi network name (SSID) (e.g., AWI-XXXXXX).

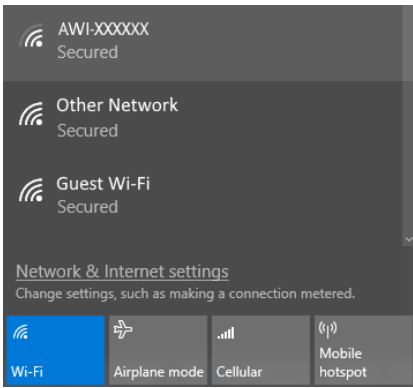


To Connect via Ethernet:

Use an Ethernet cable to connect your computer or other device to the Ethernet port on the back of your AT&T Wireless Internet device. Go to att.net (or your favorite website) to confirm your Internet connection. Skip Steps 3B and 3C.

B) Enter Wi-Fi Network Password


When prompted, enter the Wi-Fi password found on the bottom of the AT&T Wireless Internet device.

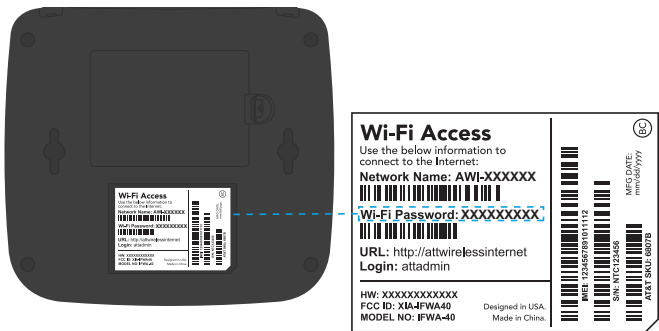

C) Confirm Internet Connection

Go to att.net (or your favorite website) to confirm your Internet connection.

When your device is transmitting to and from the Internet, the Wi-Fi light will flicker green.

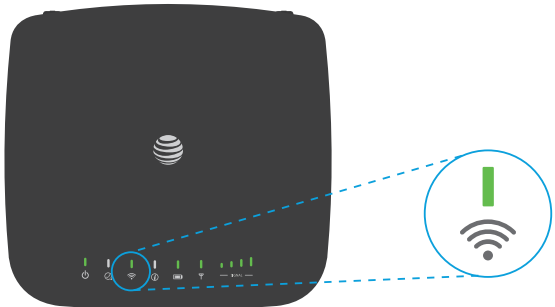


AT&T Wireless Internet Manager

To customize your device or view important messages about your device and data usage, use the AT&T Wireless Internet Manager.

On any device connected to the AT&T Wireless Internet device, enter <http://attwirelessinternet> directly in the browser address field. Use “attadmin” as your login.

NOTE: The information light will blink green when you have a message.

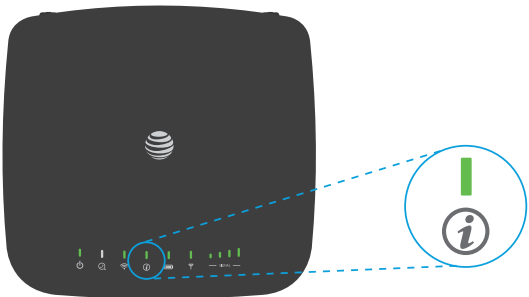

Email Setup (Optional)

To set up a free AT&T email account, go to att.net/signup.



AT&T Eco Rating 2.0 only applies to the AT&T Wireless Internet device. For limited factors evaluated visit att.com/EcoSpace. Wireless Emergency Alerts is a registered Trademark and Service Mark of CTIA.

The AT&T Wireless Internet device is a mobile device. It may be used in the U.S. with home phone equipment, computers, and other Wi-Fi compatible devices. For emergency calls, you may have to provide your location address to the 911 operator. The AT&T Wireless Internet device has a back-up battery in the event of a power outage. However, a cordless phone connected to the AT&T Wireless Internet device will not operate (including 911) during a power outage. To use backup battery power, you must plug a corded phone into the AT&T Wireless Internet device. Corded or other landline phone equipment and Internet-capable devices (e.g., PCs, tablets) not provided with service. Provides voice and wireless data service. Not compatible with wireless messaging services, security systems, fax services, medical alert and monitoring systems, credit card machines, IP/PBX phone systems, or dial-up Internet service. May not be compatible with DVR/satellite systems; please check with your provider. DSL customers should contact their provider before transferring a phone number to ensure uninterrupted DSL Internet service. The AT&T Wireless Internet device is sold for use on the AT&T wireless network and cannot be activated on other carriers' wireless networks. If your AT&T Wireless Internet device is roaming, AT&T's off-net usage restrictions apply. Service provided by AT&T Mobility. © 2019 AT&T Intellectual Property. All rights reserved. AT&T is a registered trademark of AT&T Intellectual Property.

Manual No.: MPRT00013-000 Version No.: v1.1